


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 8 TOWNSHIP 16 RANGE 4
DATE: 6-8-03
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 10-4-97

IN. S.P.C. E ZONE NAD '83
NAME: 16040805
N: 510694.5008(m)
E: 61848.1508(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

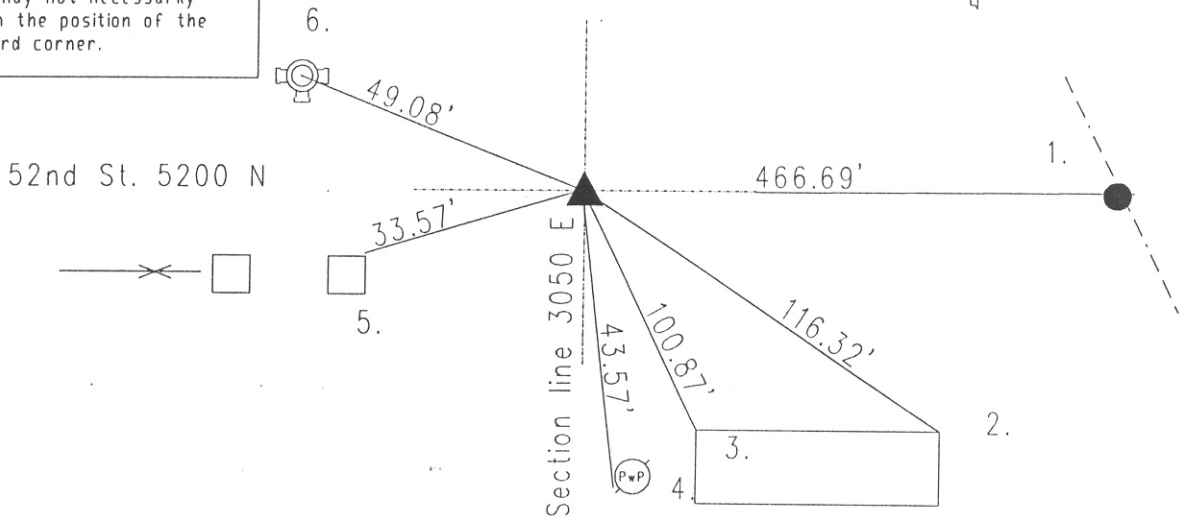

A survey by D.B. Hasbrook on February 1, 1858 indicates a stone set with the following witnesses: 30" sugar bearing south 10 degrees, thence east 45 links; and a 9" beech bearing south 45.50 degrees, thence west 56 links. (Washington Legal Book p. 23) Corner referenced by MCS on 10/28/43 and called a stone 4" down. Corner referenced by Schmidt on 9/22/61 and called a R.R. spike. Corner referenced by McLand on 1/22/69 and called a R.R. spike. Corner referenced by Wilcoxon on 11/20/75 and called a R.R. spike. Corner referenced by Wilcoxon on 10/4/97 and called a P.K. Nail. Corner excavated on 5/20/03 by Kiste and a P.K. Nail was found 4" down. No other points were found. A #205 cast iron Harrison Monument was set in position as the corner.

REF.	DISTANCE	DESCRIPTION
1.	466.69'	Due E to C/L of Allisonville Road
2.	116.32'	NE corner of Pat Flynn's Pub
3.	100.87'	NW corner "
4.	43.57'	PK nail W PwP# 112-371 A 8" up
5.	33.57'	NE corner of steel easterly gate post
6.	49.08'	Top nut of fire hydrant